

Portable LED Poster Display Installation Guide.



1. Installation Preparation

Prepare the work area, tools and supplied accessory before commencing.



CHECK LIST

- ✓ Verify the contents of the spare parts box
- ✓ Ensure all required professional tools are ready
- ✓ Place the display on a suitable flat ground surface

1.1 INCLUDED ACCESSORY

- One hex key / hex wrench
- Used to fasten screws on connecting parts between cabinets

2. Convert Display To Open Configuration

Follow the sequence below from folded to fully opened display.



2.1 UNFOLD THE TWO SIDES

- After receiving the product, unfold the two folded sides as shown in the image
- Check both sides are fully opened before continuing



2.2 RELEASE THE FIXING HOOKS

- Use the hex key to release the fixing hooks on the left and right sides
- Check both left and right fixing hooks are released

2. Convert Display To Open Configuration

Follow the sequence below from folded to fully opened display.



2.3 UNFOLD THE PS-LITE PANEL

- Unfold the folded panel of the PS-Lite
- Check the panel is fully unfolded and positioned correctly

3. Secure & Power The Display

Complete the mechanical locking before normal operation.



3.1 SECURE THE FOLDED POSITION

- Tighten the lock tongues at the folded position with the hex key, then secure the assembly with the connecting pieces
- Check the lock tongues are tightened and connecting pieces are secured



3.2 RELEASE THE FIXING HOOKS

- Connect the power supply for normal operation
- Check the assembly is mechanically secured before powering the display

4. Multi-Unit Splicing

Use this section when two or more PS-Lite units are being joined.



4.1 SELECT THE UNITS

- Select two or more PS-Lite units for the splicing assembly



4.2 POSITION & ALIGN THE UNITS

- Place the units to be spliced on a flat ground surface. Open the cover plates at the connecting positions of each unit that needs to be joined. Slowly move the units together until they fit closely



4.3 TIGHTEN THE JOINT LATCHES

- Tighten the latches at the joints with the hex key. The source guide states that there are four latches on each unit in total
- Check all required joint latches are tightened




4.4 REPEAT FOR ADDITIONAL UNITS

- Carry out splicing in sequence according to the required quantity of units to be connected

4. Multi-Unit Splicing

Use this section when two or more PS-Lite units are being joined.

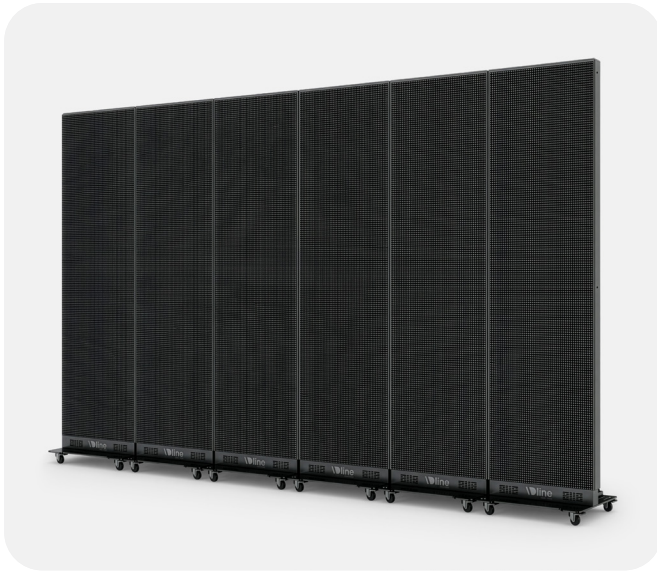


4.5 CHECK COMPLETED ASSEMBLY

- Use the front and rear views in the image on the left to confirm the completed spliced configuration

5. Signal Connection & Display Configuration

Follow the sequence below for screen activation.

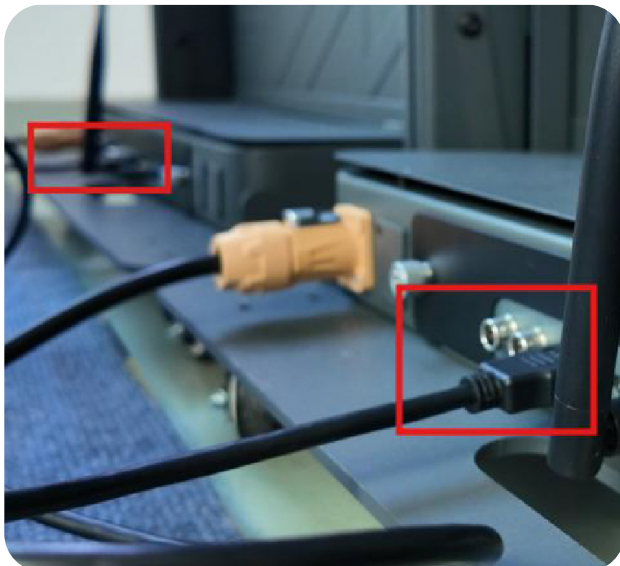

5.1 CONNECT HDMI SIGNAL CABLES

- Connect each PS-Lite in series via HDMI signal cables
- Check each unit is connected in the required series



5.2 CONFIGURE COMBINED IMAGE

- After splicing is finished, use Nova control software to combine the display screens into one complete picture
- Refer to the **Nova TB Series User Manual** for software operating instructions

6. Final Installation Check & Support

Complete the checks below before handing the installed display to the operator.

CHECK LIST

- ✓ Display panels fully unfolded and positioned correctly
- ✓ Lock tongues tightened
- ✓ Connecting pieces secured
- ✓ Spliced units fit closely together
- ✓ Joint latches tightened
- ✓ HDMI series connections completed
- ✓ Combined image configured through **Nova TB Series** control software

SERVICE & SUPPORT

Tel: 1300 658 808

Email: sales@slimlinewarehouse.com.au

IMPORTANT

This installation manual is applicable to all products of this series. Installation procedures for other specifications and dimensions can be implemented by analogy with this manual.



Slimline Warehouse: 4 Military Road, Broadmeadows VIC 3047.
Tel: 1300 658 808. **Email:** sales@slimlinewarehouse.com.au