INSTALLATION GUIDE
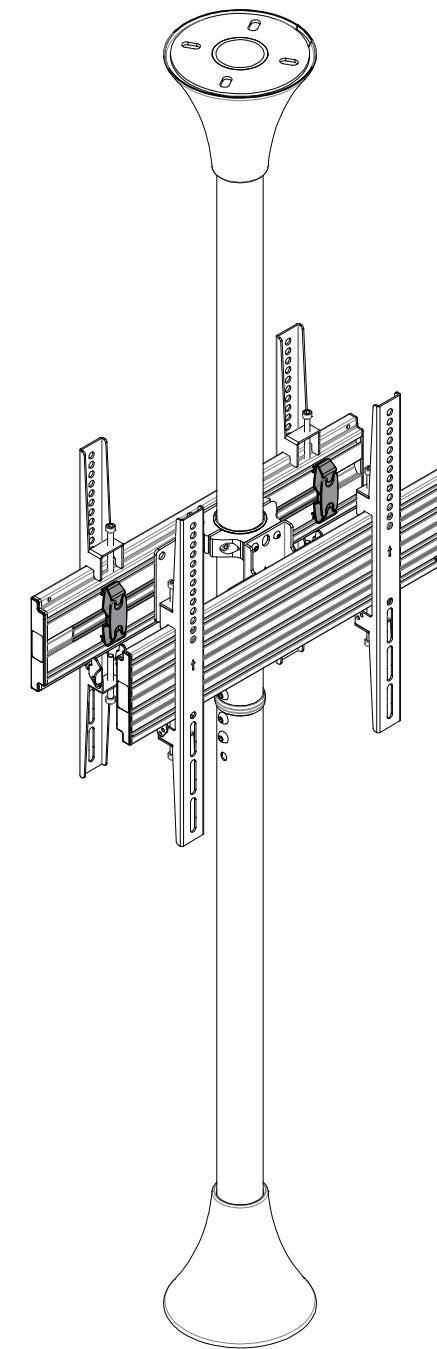
SEF2CDS

Support 32" to 65" Screen Size

Max Load Capacity: 66lbs (30 kg)   Per Screen

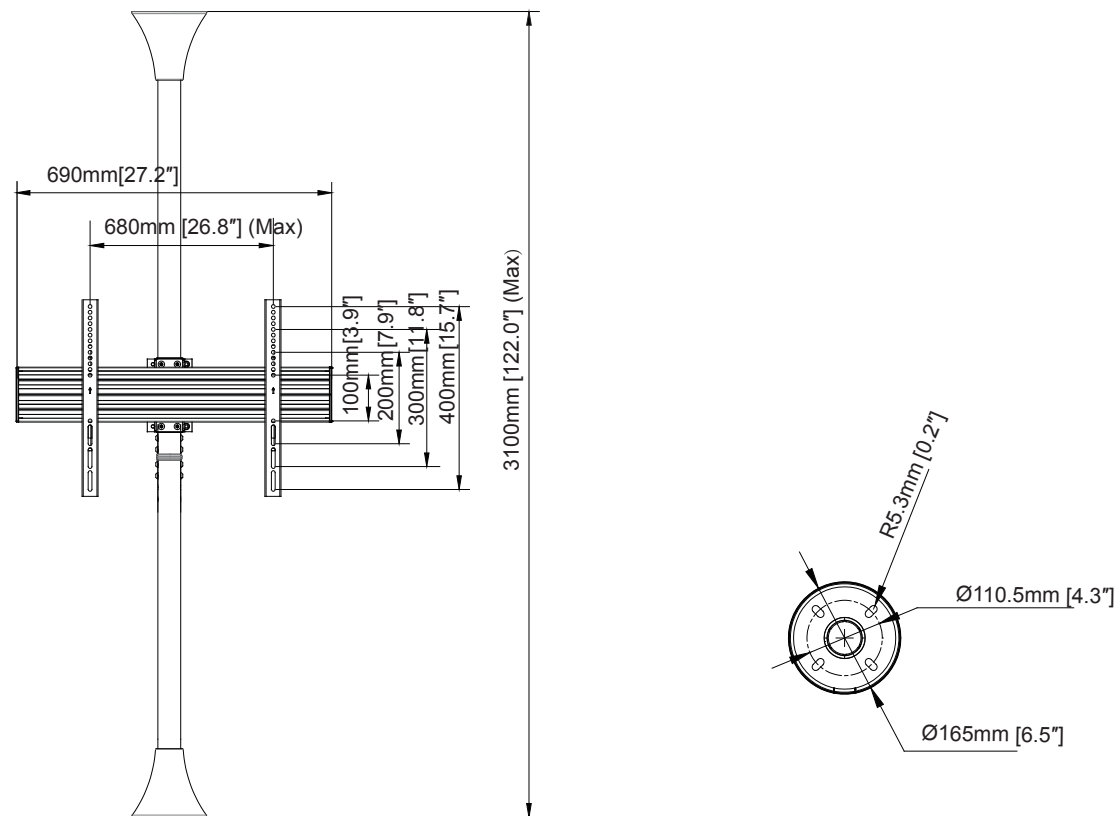**VESA 100x100mm / 600x400mm compatible**

wire cable

User's Manual

⚠ WARNING

- Be sure to read this entire manual thoroughly and you fully understand all the instructions and warning before attempting to begin your installation.

- This product should only be installed by someone who has a basic knowledge of building construction,installations and fully understands these instructions.

- Always have someone assist you to lift and position your equipment.

- Tighten screws and bolts firmly, but do not over tighten. Over tightening can damage the items and greatly reduce their ability to hold. Please refer to suggested torque values where applicable in these instructions.

Dimensions

690mm[27.2"]
680mm [26.8"] (Max)
100mm[3.9"]
200mm[7.9"]
300mm[11.8"]
400mm[15.7"]
3100mm [122.0"] (Max)

R5.3mm[0.2"]
Ø110.5mm [4.3"]
Ø165mm [6.5"]

Parts list

A1	A2	A3	A4	A5	A6	A7		D1	D2	D3	
M5X15	M6X15	M8X25	Ø16XØ6.2X1.5	M8X45	Ø16XØ8.2X1.5	Ø13XØ8.2X13	X2		M8X10		X1
X4	X4	X4	X4	X4	X4	X4		X2	X8	X1	

C1	C2	C3	C4	C5		B1	B2	B3	B4	B5	B6	
M8X70	M8	Ø16XØ8.2X1.5	Lag bolt	Anchor	X1	3mm	5mm	6mm		M8X10	M8	X1
X2	X2	X8	X8	X8		X1	X1	X1	X1	X8	X8	

⑲

15

6 mm

16

A1/A2/A3
A4

A6
A7
A5

*For screen with a hole
pattern in a pocket,spacer
go between Assembly
Adapter Plate and screen. **Spacer**

17

18

5 mm

D11

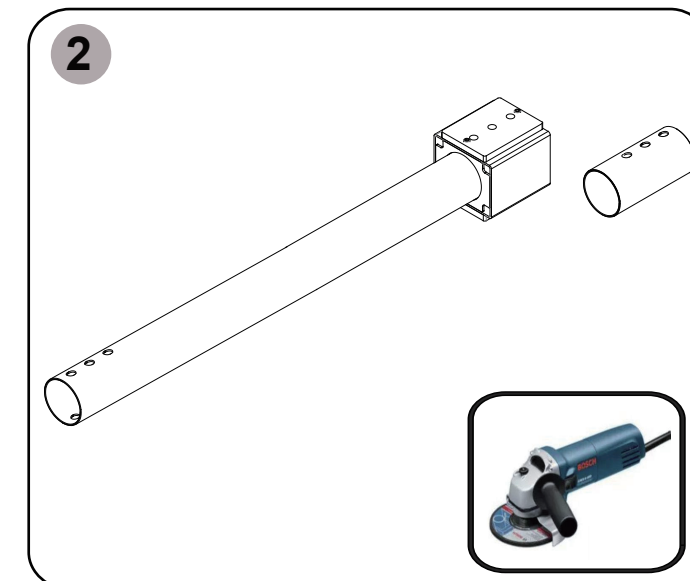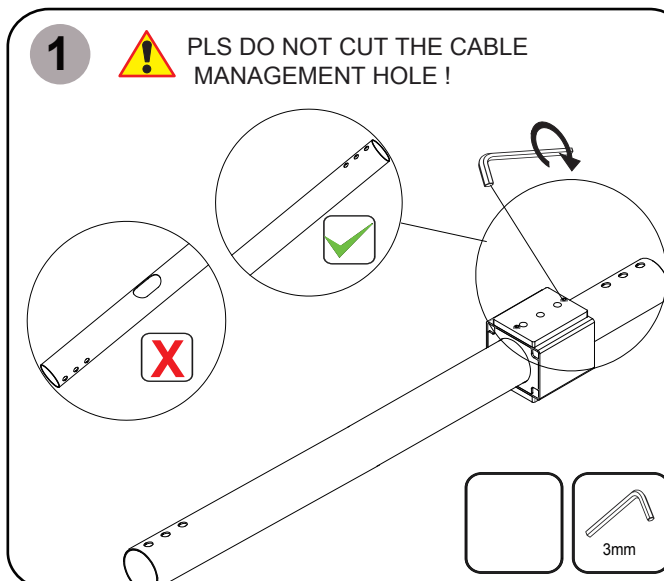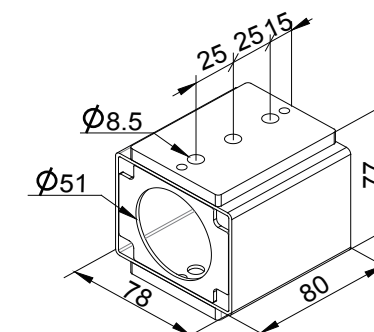| D4	D5	D6	D7	D8	D9	D10	D11
X2	X2	1500mm X2	680mm X2	X1	F400 X4	X4	X4
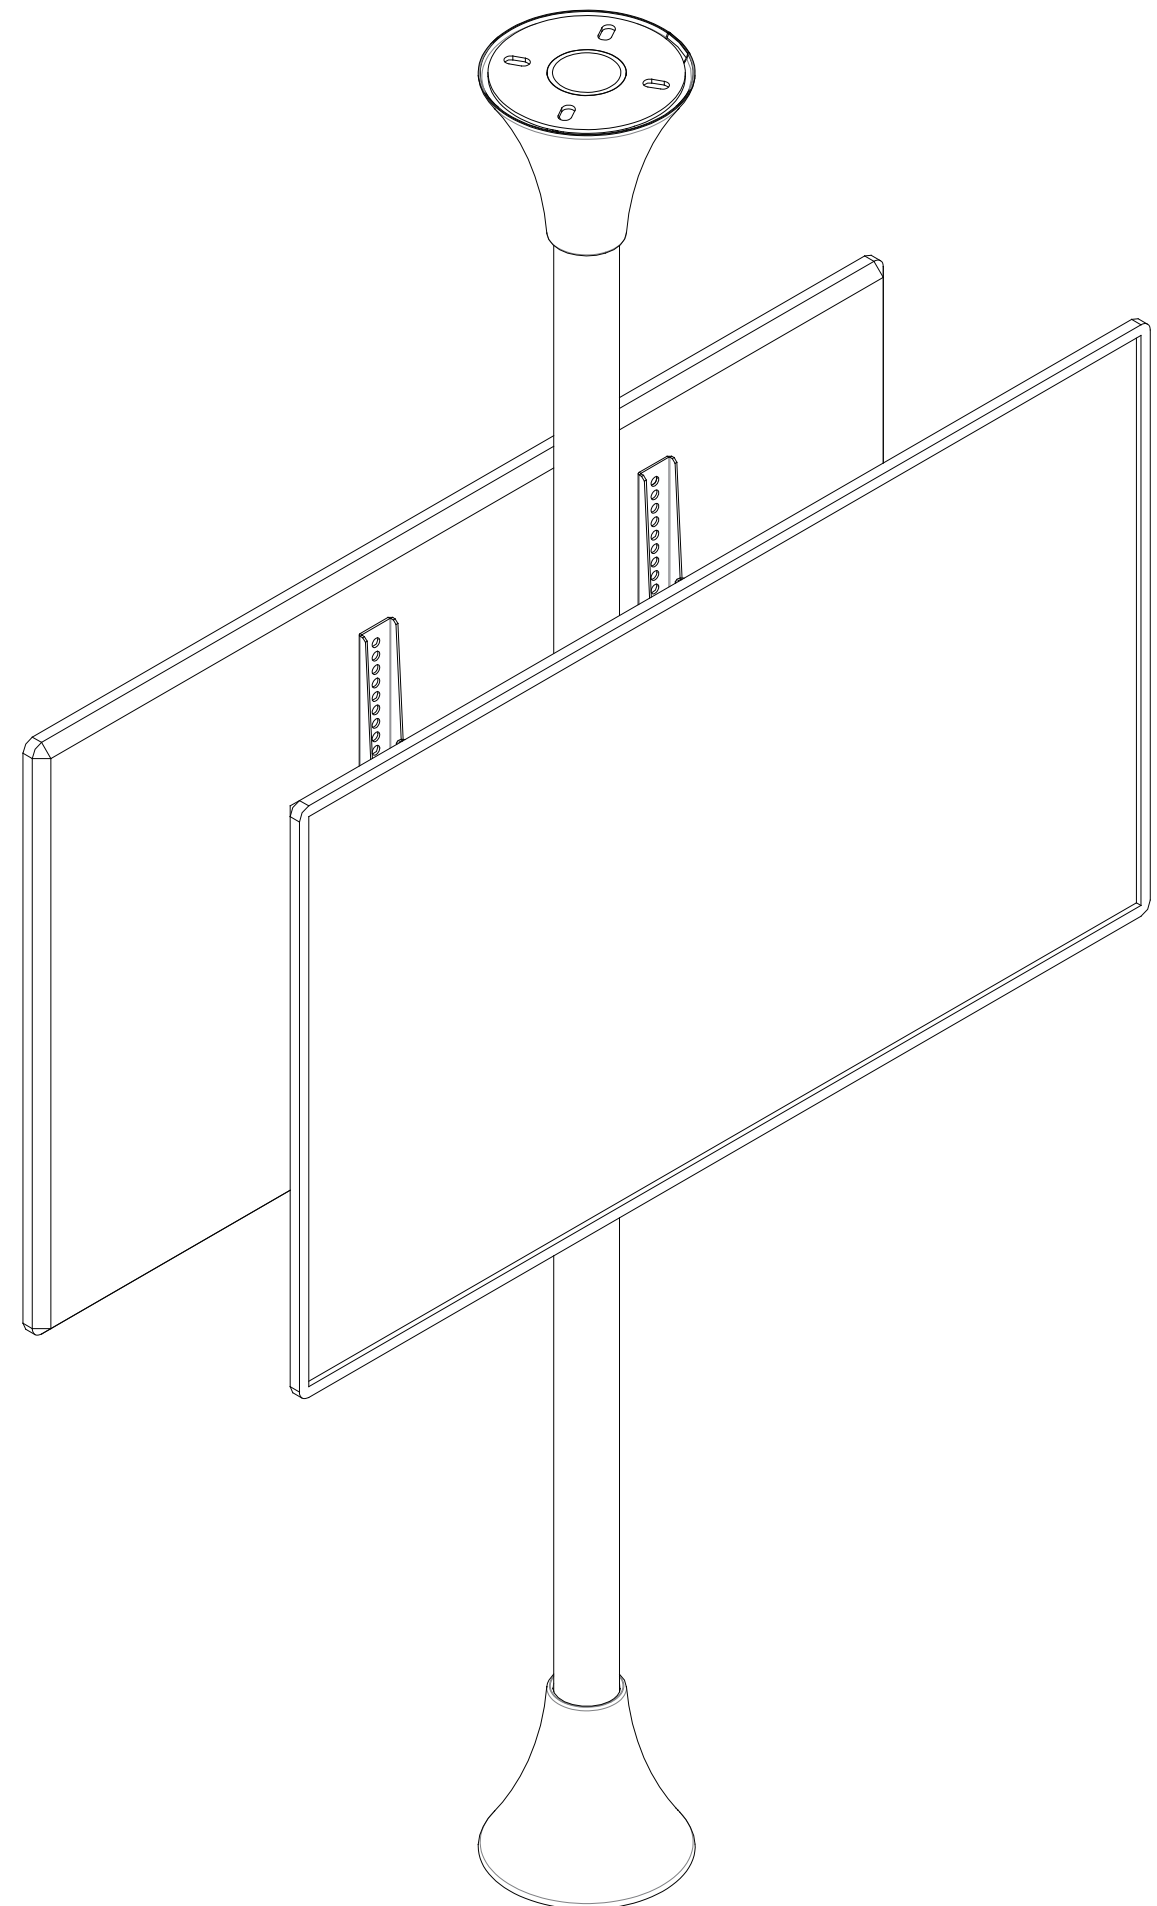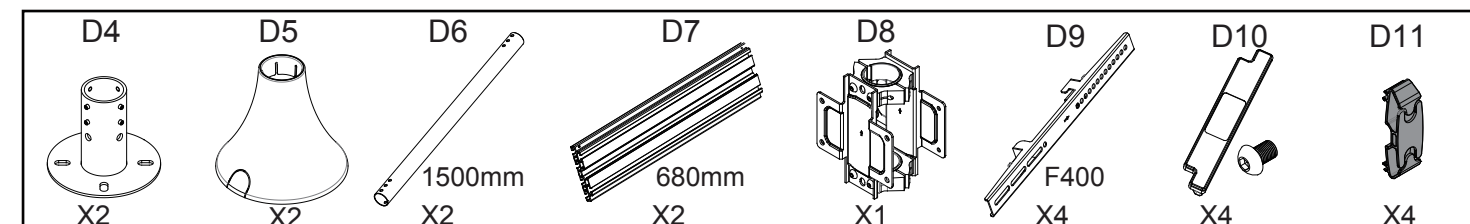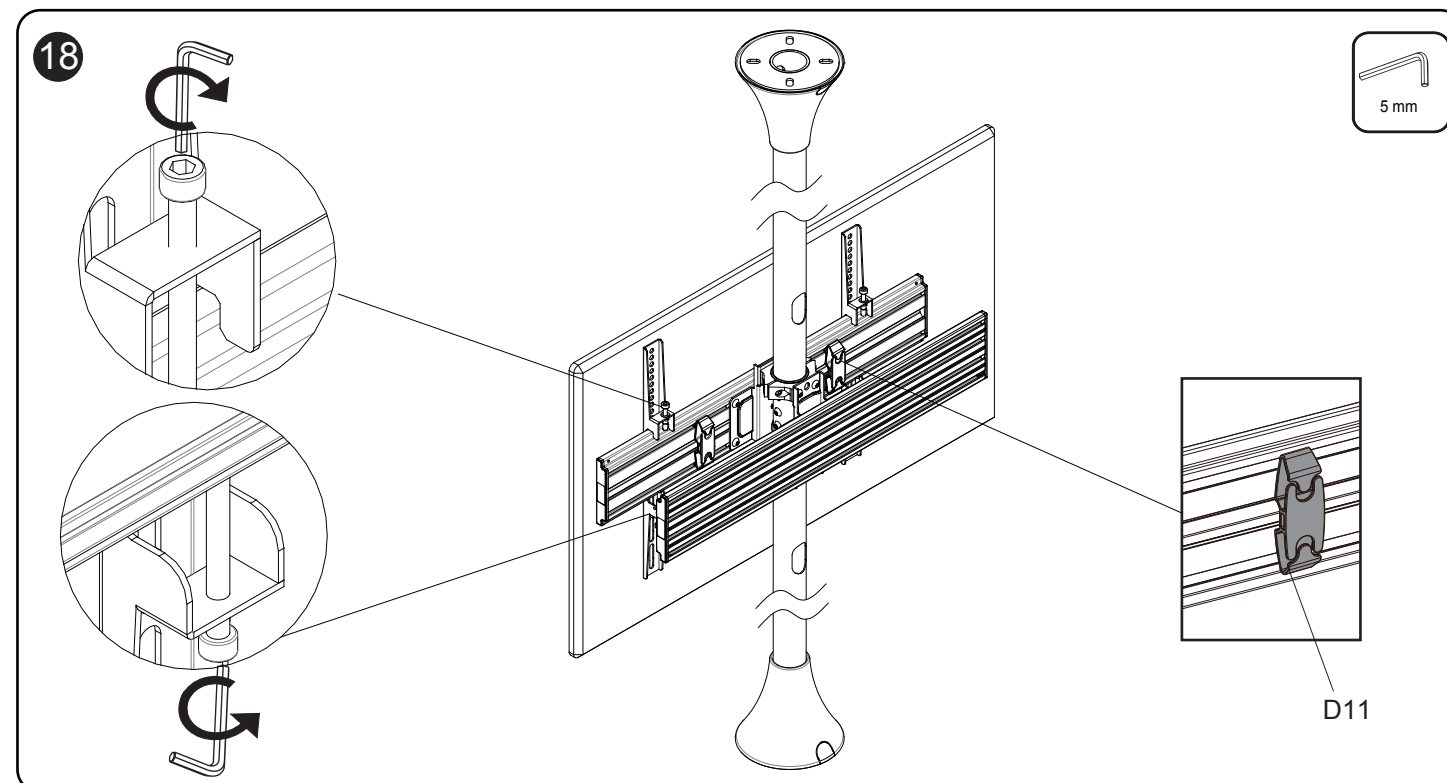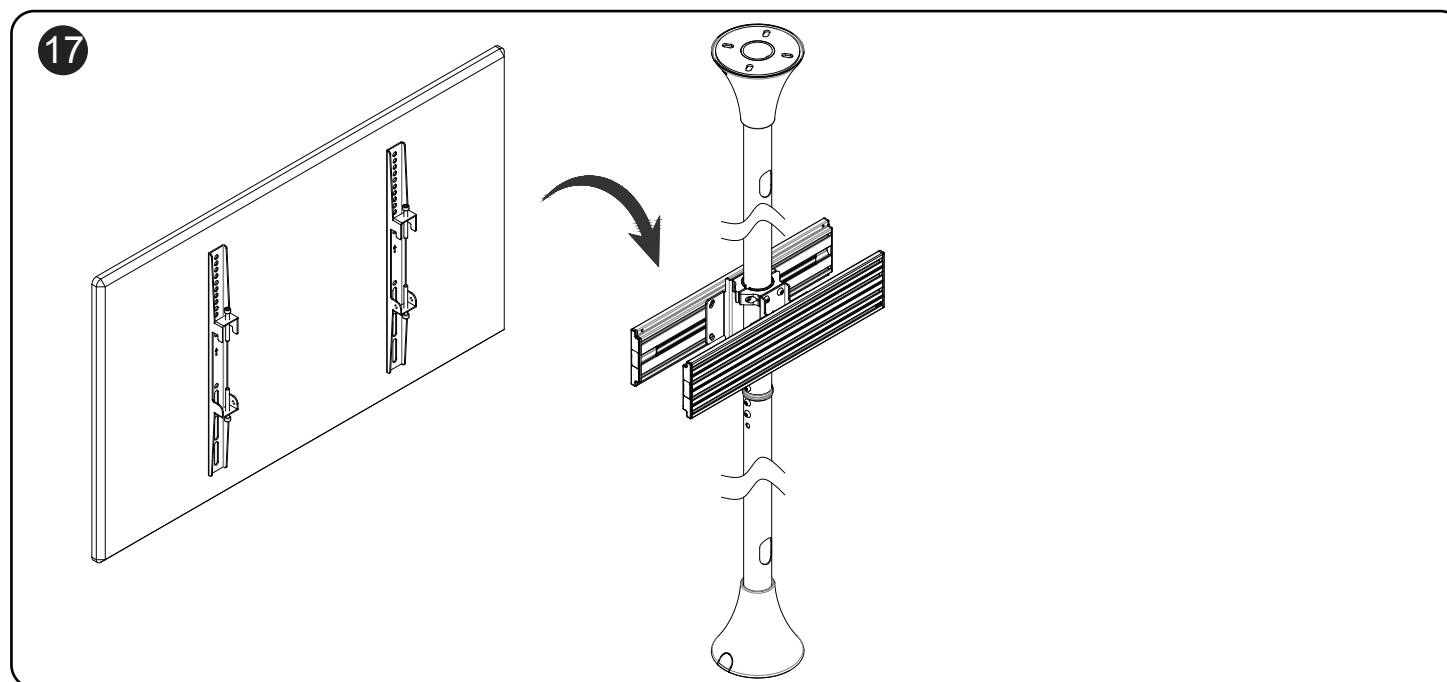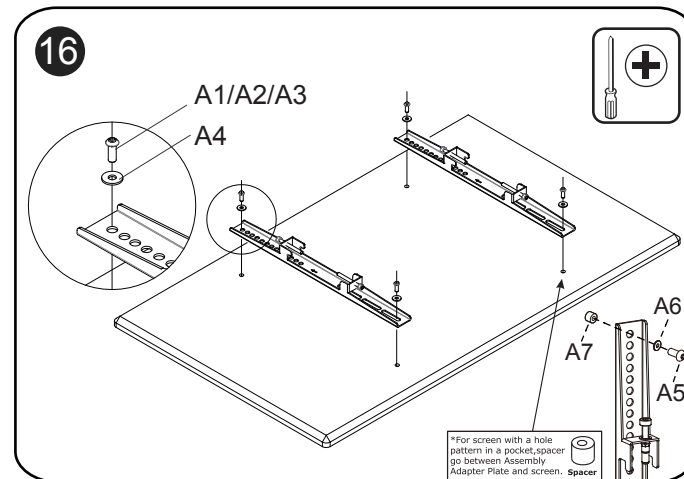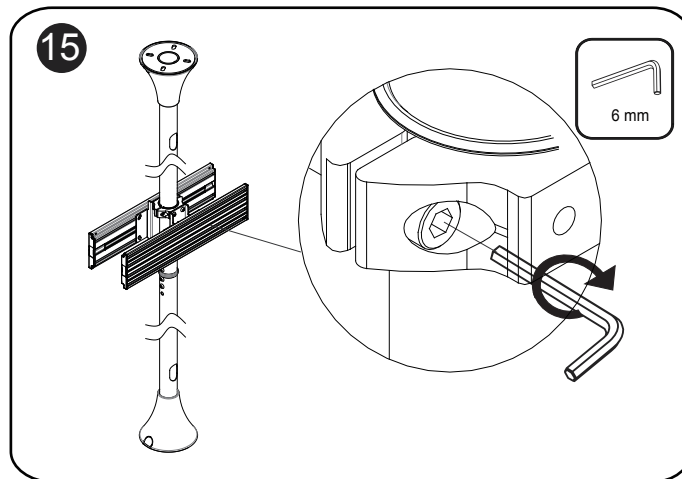
Optional Tool (Not Included in the box)

The tool for drilling new holes
when extension pipe has been cut.

25 25 15
Ø8.5
Ø51
77
78   80

1 ⚠ PLS DO NOT CUT THE CABLE
MANAGEMENT HOLE !

✖

3mm

2

3

8mm

4

3mm

Installation

1
D1
D2
B2
D6
5mm

2
D3

9 BRICK OR CONCRETE
C5
C3
C4

9 WOOD
C3
C4

3
5mm

4

10 BRICK OR CONCRETE
C4
C3
C5

10 WOOD
C4
C3

5

6

11
B6

12
D10
D10

7
B1
D4
C2
C1
B3
3 and 6mm

8
B1
3 mm

13
6 mm

14
B5
5 mm