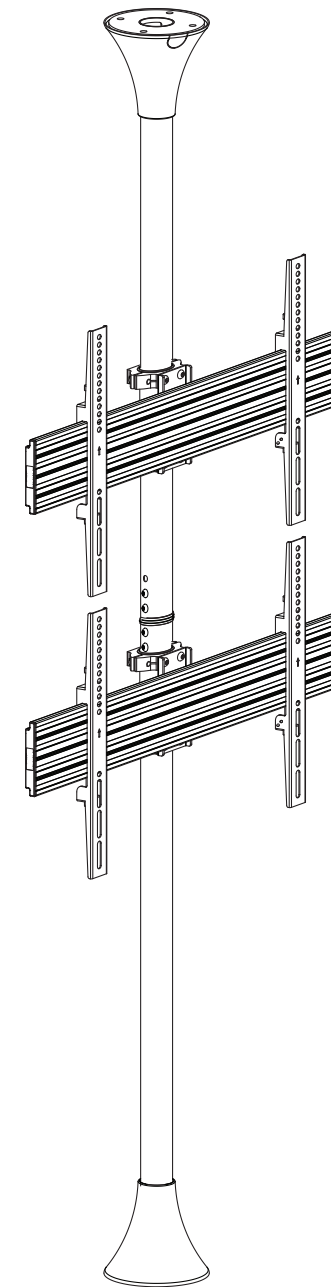# INSTALLATION GUIDE

SEF2C2T

Support 32" to 65" Screen Size

Max Load Capacity: 66lbs (30 kg) Per Screen

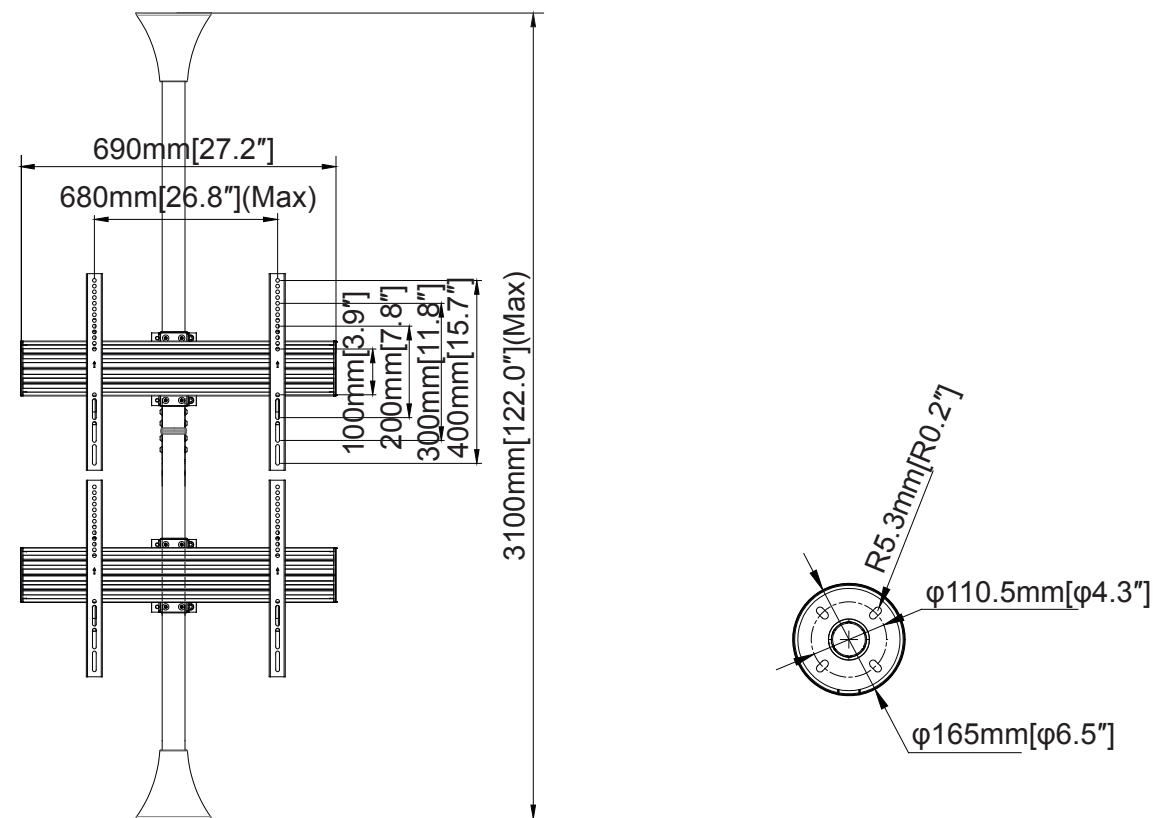**VESA 100x100mm / 600x400mm compatible**

User's Manual

⚠ WARNING

- Be sure to read this entire manual thoroughly and you fully understand all the instructions and warning before attempting to begin your installation.

- This product should only be installed by someone who has a basic knowledge of building construction,installations and fully understands these instructions.

- Always have someone assist you to lift and position your equipment.

- Tighten screws and bolts firmly, but do not over tighten. Over tightening can damage the items and greatly reduce their ability to hold. Please refer to suggested torque values where applicable in these instructions.

Dimensions

690mm[27.2"]
680mm[26.8"](Max)
100mm[3.9"]
200mm[7.8"]
300mm[11.8"]
400mm[15.7"](Max)
3100mm[122.0"](Max)

R5.3mm[R0.2"]
φ110.5mm[φ4.3"]
φ165mm[φ6.5"]

Parts list

A1	A2	A3	A4	A5	A6	A7	
M5X15	M6X15	M8X25	Ø16X Ø6.2X1.5	M8X45	Ø16X Ø8.2X1.5	Ø13X Ø8.2X13	X2
X4	X4	X4	X4	X4	X4	X4	

B1	B2	B3	B4	B5	
3mm	5mm	6mm	M8X10	M8	X1
X1	X1	X1	X8	X8	

C1	C2	C3	C4	C5	C6	
M8X70	M8		Ø16X Ø8.2X1.5	Lag bolt	Anchor	X1
X2	X2	X1	X8	X8	X8	

D1	D2	D3	
	M8X10		X1
X2	X8	X1	

wire cable

⑮

6 mm

⑯ A1+A4/A2+A4/A3

A4

A6
A7
A5

*For screen with a hole pattern in a pocket,Spacer go between Assembly Adapter Plate and screen. Spacer

⑰ ⚠

⑱

⑲

5 mm

⑳ Cable Management

D11

D4	D5	D6	D7	D8	D9	D10	D11
		1500mm	680mm		400F	M5	
X2	X2	X2	X2	X2	X4	X4	X4
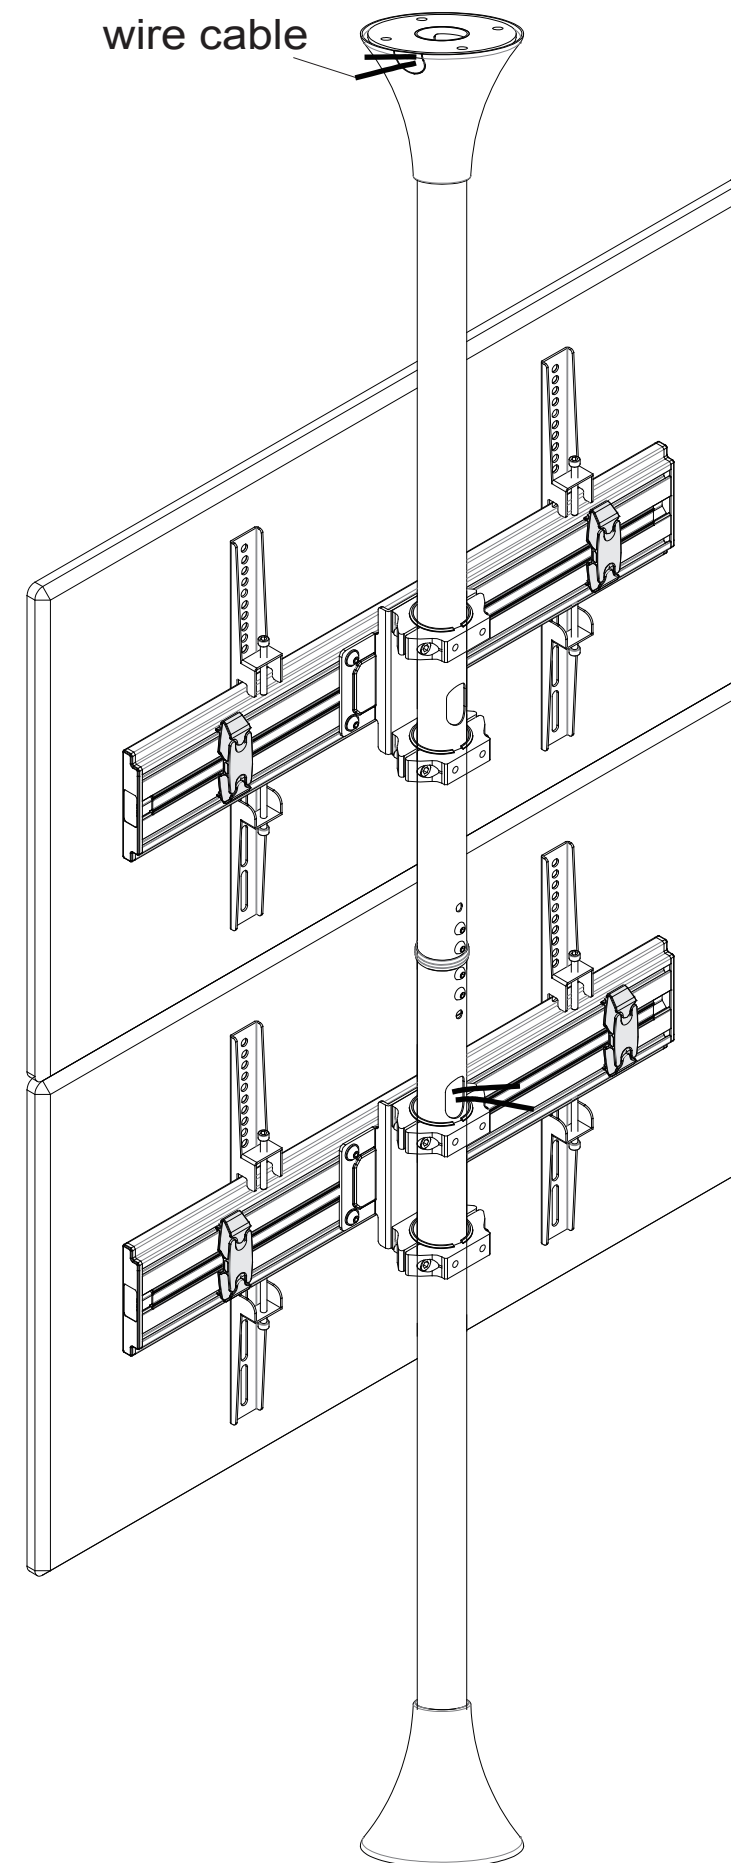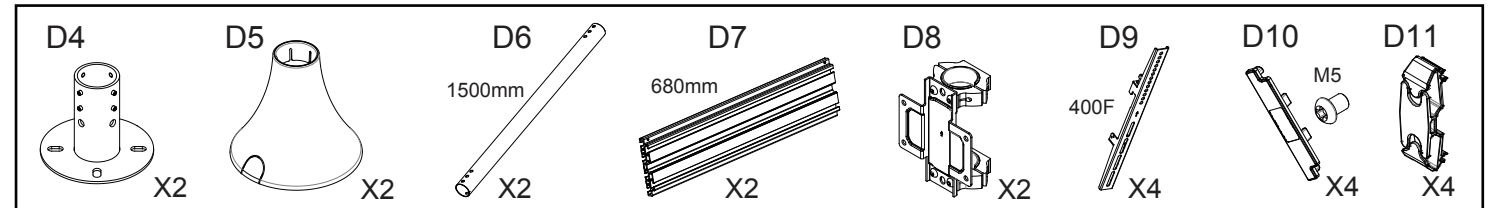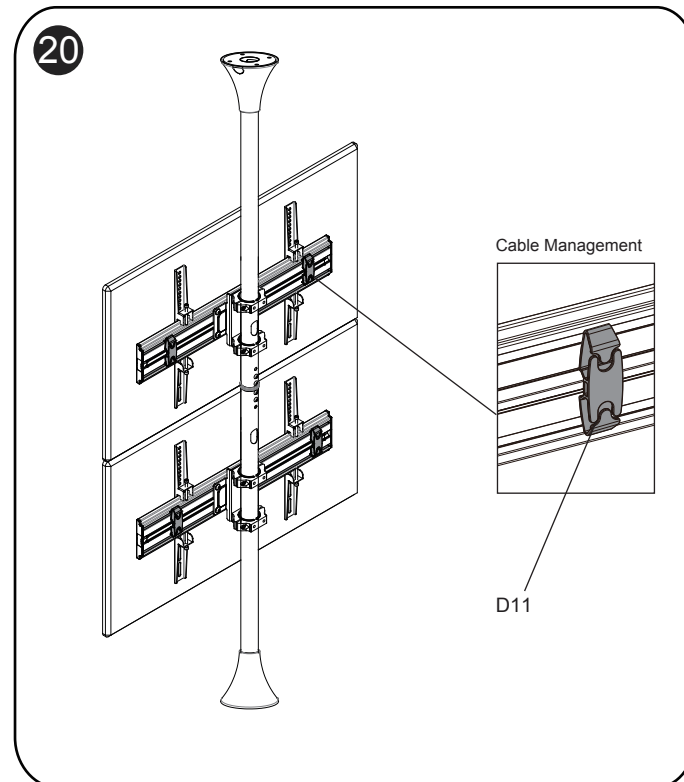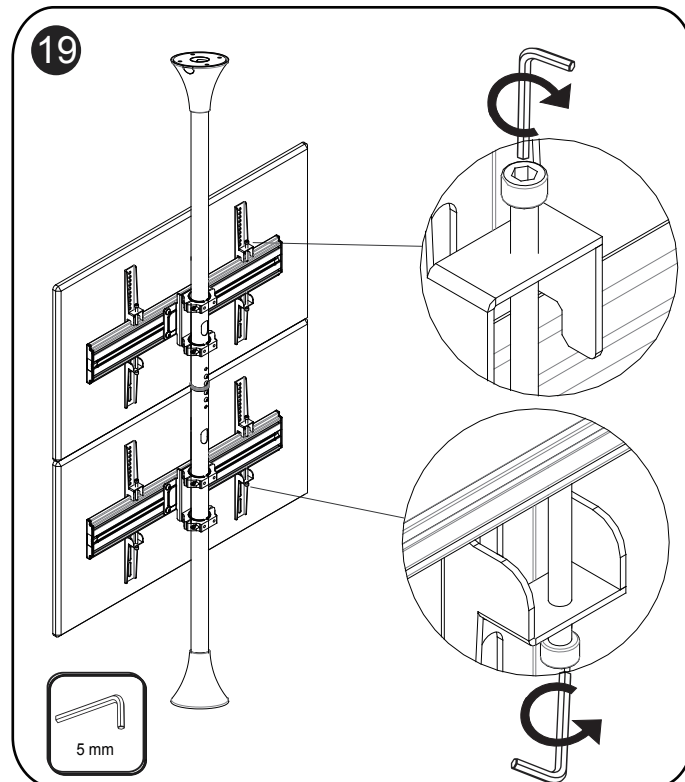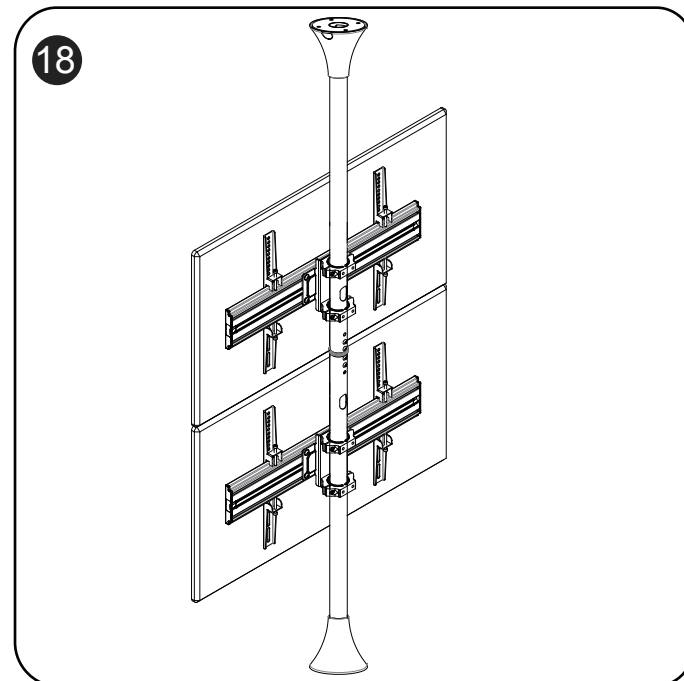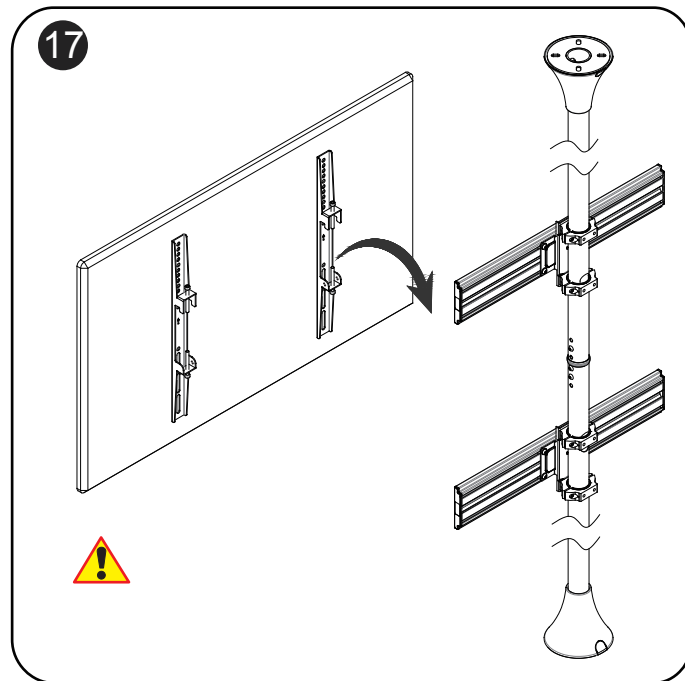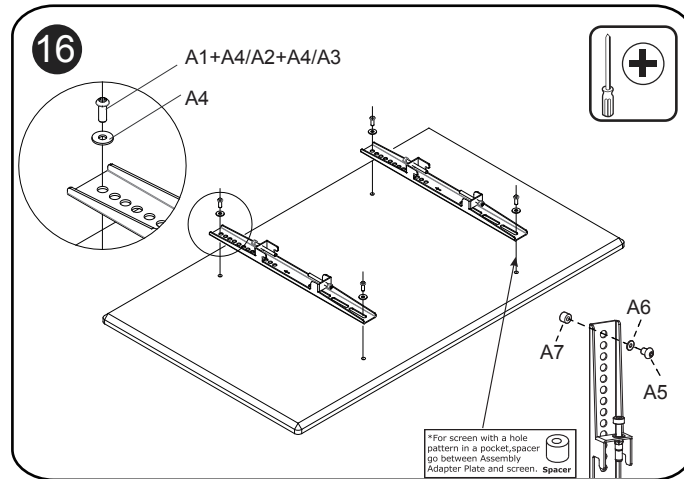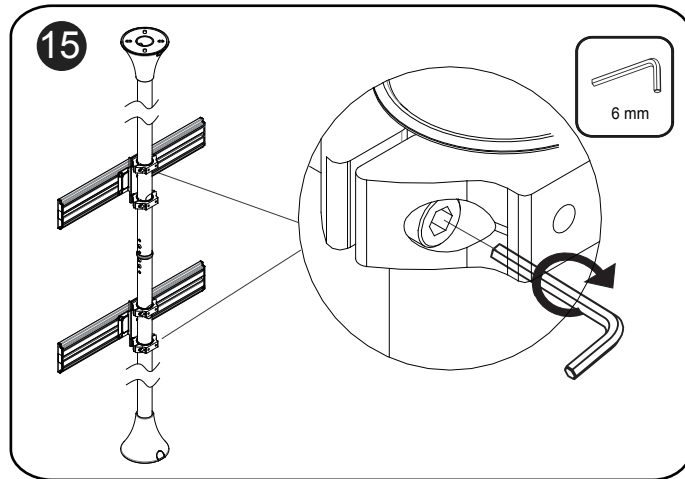
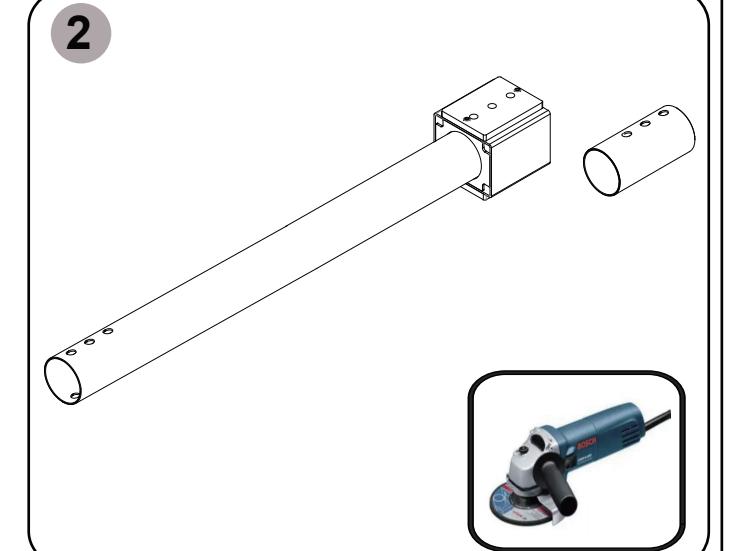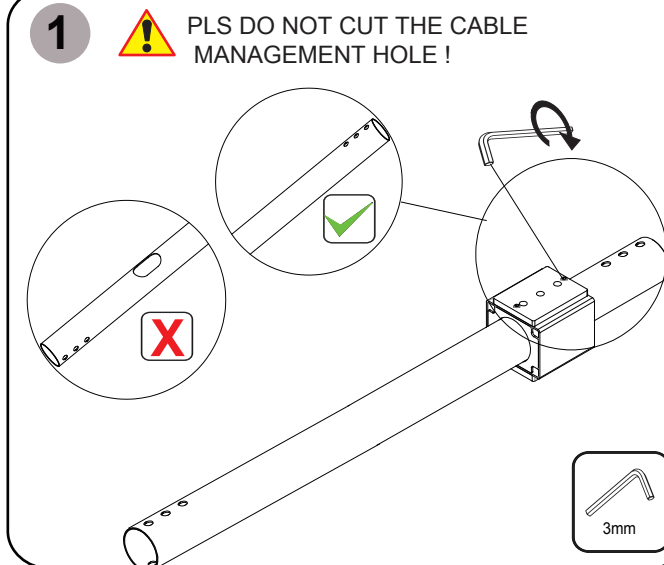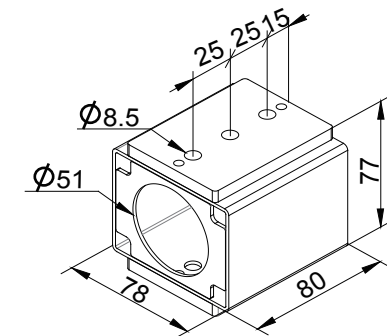**Optional Tool (Not Included in the box)**

The tool for drilling new holes
when extension pipe has been cut.

25 25 15
Ø8.5
Ø51
77
78
80

1 ⚠ PLS DO NOT CUT THE CABLE
MANAGEMENT HOLE !

✓

✗

3mm

2

3

8mm

4

3mm

Installation

1
D1
D2
D6
B2
5mm

2
D3

3
5mm

4

5

6

7 Bottom
B1
D4
C2
C1
B3
3 and 6mm

8 Top
B3
C1
C2
D4
B1
3 and 6mm

9 BRICK OR CONCRETE
C6
C4
C5

9 WOOD
C4
C5

10 BRICK OR CONCRETE
C5
C4
C6

10 WOOD
C5
C4

11
D10
B5
D10

12
D10

13
5 mm
B4

14
6 mm