




# Installing the ashtray




1. Mark the position of the holes at 10.5cm apart on the wall. Drill the holes in using an impact drill.



2. Knock the bolts into the wall until the flange is flush to the wall surface.

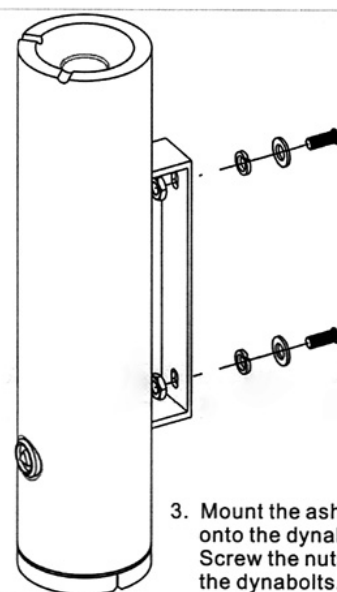

3. Mount the ashtray onto the dynabolts. Screw the nuts onto the dynabolts.

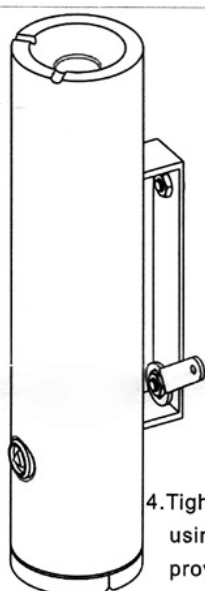

4. Tighten the nuts using the spanner provided.



5. Unit is ready



brush



key




spanner



dynabolts

**Hardware Provided**

## Maintenance advice

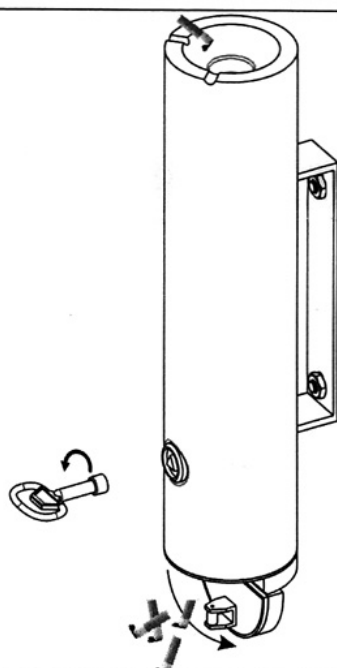

1. It is recommended to empty the ashtray frequently. Use the cleaning brush provided to keep the bottom lid clean.

2. Clean the ashtray with a damp cloth soaked in mild soap and wipe dry.

